

PRODUCT CODE 0023

Professional Premium Gloss Enamel

Asian Paints Professional Premium Gloss Enamel imparts a shiny new look to surfaces painted with this finish. It forms a tough film that is highly resistant to stains. It thereby serves as a protective armour around the painted surface.

PRODUCT BENEFITS

High Gloss Finish

Professional Premium Gloss Enamel gives a mirror like gloss for your doors, windows, grills & gates

Tough and Durable

The oil based film of Professional Premium Gloss Enamel makes it one of the toughest & most durable paints which forms a protective armour around surfaces

Stain Gaurd

Professional Premium Gloss Enamel is a highly washable paint, thus you can wipe off most common stains easily



SOLVENT BASED

asianpaints

LEAD FREE*GUARANTEE

* All Asian Paints products contain no added Lead, Mercury, Arsenic or Chromium from April 2008.




PRODUCT FEATURES

WASHABILITY



AVAILABLE PACKS

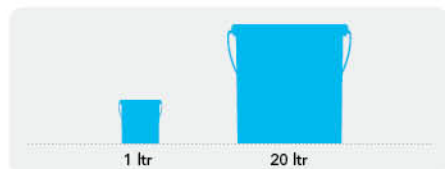


Shelf life: 3 years from date of manufacture in original tightly closed containers away from direct sunlight and excessive heat.


COLOURS AVAILABLE

Black, White, Golden Yellow, Smoke Grey (G)

Currently available in 4 shades



FINISH

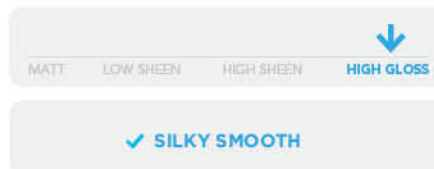

Refer to sheen levels in technical details

COVERAGE

On smooth masonry surface by brushing

1 COAT
180 - 200
sq. ft./litre**

2 COATS
90 - 100
sq. ft./litre**

**Actual coverage may vary from the quoted coverage due to factors such as method and condition of application and surface roughness and porosity.

HOW TO APPLY

PRE PAINTING STEPS



PLASTER New masonry surfaces must be allowed to cure completely. It is recommended to allow 28 days as the curing time for new masonry surfaces.



CLEANING Surface should be free from any loose paint, dust or grease. Growths of fungus, algae or moss should be removed by wire brushing and water. In case of areas having excessive dampness use Asian Paints DampBlock to limit further dampness. When the underlying surface exhibits chalkiness, in spite of thorough surface cleaning, use Asian Paints SmartCare Exterior Sealer.



FILLING FOR CRACKS For filling masonry upto 3mm use Asian Paints SmartCare Crack Seal.



FILLING FOR HOLES & DENTS In case of dents and holes use Asian Paints TruCare Acrylic Wall Putty or white cement and fine sand in the ratio 1:3.

Professional Premium Gloss Enamel should not be applied on surfaces / substrates that are subjected to continuous seepage or dampness.

PAINT APPLICATION PROCESS

APPLICATION	CODE	THINNER	DILUTION %	APPLICATION VISCOSITY ¹	RECOATING PERIOD
SAND THE SURFACE WITH SAND PAPER 180 AND WIPE CLEAN					
STEP 1 SANDING	0005 0359 0007	MTO*	BRUSH 4 - 10 SPRAY 12 - 15	BRUSH 30 - 40 SPRAY 20 - 25	6 - 8 HRS
STEP 2 METAL PRIMER (METAL) / WALL PRIMER (MASONRY) / WOOD PRIMER (WOOD)					
STEP 3 KNIFING PASTE FILLER (METAL / WOOD) WALL PUTTY (MASONRY) PUTTY KNIFE	0016 1354	MTO WATER	BASED ON REQUIREMENT	BASED ON REQUIREMENT	6 - 8 HRS 4 - 6 HRS
STEP 4 SANDING					
SAND THE SURFACE WITH SAND PAPER 180 AND WIPE CLEAN					
STEP 5 METAL PRIMER (METAL) / WALL PRIMER (MASONRY) / WOOD PRIMER (WOOD)	0005 0359 0007	MTO*	BRUSH 4 - 10 SPRAY 12 - 15	BRUSH 30 - 40 SPRAY 20 - 25	6 - 8 HRS
STEP 6 SANDING					
SAND THE SURFACE WITH SAND PAPER 320 AND WIPE CLEAN					
STEP 7 FIRST COAT PROFESSIONAL PREMIUM GLOSS ENAMEL BRUSH / ROLLER / SPRAY	0023	MTO*	BRUSH 8 - 10 SPRAY 15 - 20	BRUSH 50 - 60 SPRAY 22 - 25	6 - 8 HRS
STEP 8 SECOND COAT PROFESSIONAL PREMIUM GLOSS ENAMEL BRUSH / ROLLER / SPRAY	0023	MTO*	BRUSH 8 - 10 SPRAY 15 - 20	BRUSH 50 - 60 SPRAY 22 - 25	6 - 8 HRS

(1.) As measured through a Ford cup. (2.) Recoat period is quoted for 25°C and 50% Relative Humidity, these may vary under different conditions. (3.) Ensure that the metal substrates are free from oil, grease and rust before paint application. * Mineral Turpentine Oil

ADDITIONAL INFORMATION

POST PAINTING CARE

For the best performance of the paint, ensure proper washing and cleaning of all algal and fungal growth, if any, at regular intervals of six months.

TECHNICAL DETAILS

- a. IS Certification:** IS 2933 Certified
- b. Drying time:** Surface dry time 3 hours
- c. Gloss levels:** 75 - 85 on tin plate at 20° Gloss Head
- d. Flash point IS101/1987 Part 1 Sec 6:** 35°C (95°F)
- e. Stability of thinned paint:** To be used within 24 hours

PRECAUTIONS

- Do not apply when ambient temperature is less than 10°C or if the temperature might drop to this level within 4 hours of application.
- Do not over-thin or over-extend the brush.
- Stir well and strain before use.

SAFETY FEATURES

- Kindly refer to the MSDS for Asian Paints Professional Premium Gloss Enamel which gives detailed information on safety measures while handling the paint, which is available on request.
- Store the container with the lid tightly closed in an upright position, in a cool, dry place.
- Keep out of reach of children and away from eatables.
- May be harmful if swallowed. In case of ingestion seek immediate medical attention.
- Wear eye protection during application. In case of contact with eyes, rinse immediately with plenty of water and seek medical advice.
- In case of skin contact immediately wash skin with soap and plenty of water. Get medical attention if irritation develops or persists.
- Do not breathe vapour or spray. It is recommended to wear suitable nose pad during sanding and surface preparation to avoid dust inhalation.
- Do not pour leftover paint down the drain or in water courses.
- In the event of spills, contain spillage using sand or earth.
- No added Lead, Mercury or Chromium compounds.