

PRODUCT CODE 6757

## Suprema Advanced Premium Gloss Enamel

Asian Paints Suprema Advanced Premium Gloss Enamel imparts a shiny new look to surfaces painted with this finish. It forms a tough film that is highly resistant to household stains. It thereby serves as a protective armour around the painted surface.



### PRODUCT BENEFITS

#### High Gloss Finish

Suprema Advanced Premium Gloss Enamel gives a mirror like gloss for your doors, windows, grills & gates

#### Tough and Durable

The oil based film of Suprema Advanced Premium Gloss Enamel makes it one of the toughest & most durable paints which forms a protective armor around surfaces


#### Stain Guard

Suprema Advanced Premium Gloss Enamel is a highly washable paint, thus you can wipe off most common household stains easily




### PRODUCT FEATURES

#### WASHABILITY

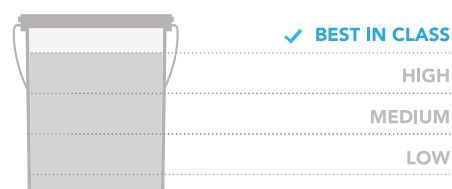

#### AVAILABLE PACKS

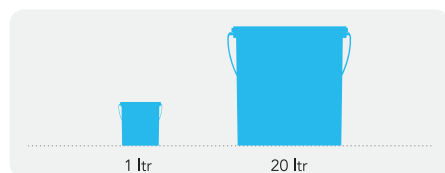


Shelf life: 3 years from date of manufacture in original tightly closed containers away from direct sunlight and excessive heat.


#### COLOURS AVAILABLE

**Black, White, GoldenYellow, Smoke Gray (G) Phirozi, PO Red, New Olive Green**

Currently available in 7 shades




#### FINISH

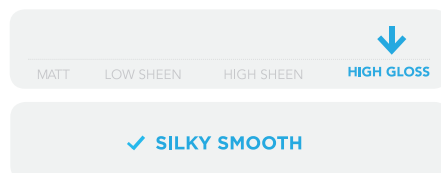

Refer to sheen levels in technical details

#### COVERAGE

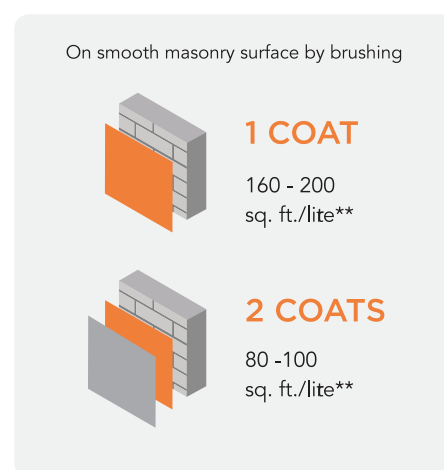

\*\*Actual coverage may vary from the quoted coverage due to factors such as method and condition of application and surface roughness and porosity.

### HOW TO APPLY

#### PRE PAINTING STEPS

**PLASTER** New masonry surfaces must be allowed to cure completely. It is recommended to allow 28 days as the curing time for new masonry surfaces.

**CLEANING** Surface should be free from any loose paint, dust or grease. Growths of fungus, algae or moss should be removed by wire brushing and water. In case of areas having excessive dampness use Asian Paints DampBlock to limit further dampness. When the underlying surface exhibits chalkiness, in spite of thorough surface cleaning, use Asian Paints SmartCare Exterior Sealer.

**FILLING FOR CRACKS** For filling masonry upto 3mm, use Asian Paints SmartCare Crack Seal.

**FILLING FOR HOLES & DENTS** In case of dents and holes, use Asian Paints IruCare Acrylic Wall Putty or white cement and fine sand in the ratio 1:3.

**Suprema Advanced Premium Gloss Enamel should not be applied on surfaces / substrates that are subjected to continuous seepage or dampness.**

#### PAINT APPLICATION PROCESS

| APPLICATION                                                                                | CODE                                                | THINNER      | DILUTION %                    | APPLICATION VISCOSITY <sup>1</sup> | RECOATING PERIOD       |
|--------------------------------------------------------------------------------------------|-----------------------------------------------------|--------------|-------------------------------|------------------------------------|------------------------|
| SAND THE SURFACE WITH SAND PAPER 180 AND WIPE CLEAN                                        |                                                     |              |                               |                                    |                        |
| STEP 1<br>SANDING                                                                          | 0005<br>0359<br>0007                                | MTO*         | BRUSH 4 - 10<br>SPRAY 12 - 15 | BRUSH 30 - 40<br>SPRAY 20 - 25     | 6 - 8 HRS              |
| STEP 2<br>METAL PRIMER (METAL) /<br>WALL PRIMER (MASONRY) /<br>WOOD PRIMER (WOOD)          | 0016<br>1354                                        | MTO<br>WATER | BASED ON<br>REQUIREMENT       | BASED ON<br>REQUIREMENT            | 6 - 8 HRS<br>4 - 6 HRS |
| STEP 3<br>KNIFING PASTE FILLER (METAL / WOOD)<br>WALL PUTTY (MASONRY)<br>PUTTY KNIFE       | SAND THE SURFACE WITH SAND PAPER 180 AND WIPE CLEAN |              |                               |                                    |                        |
| STEP 4<br>SANDING                                                                          | 0005<br>0359<br>0007                                | MTO*         | BRUSH 4 - 10<br>SPRAY 12 - 15 | BRUSH 30 - 40<br>SPRAY 20 - 25     | 6 - 8 HRS              |
| STEP 5<br>METAL PRIMER (METAL) /<br>WALL PRIMER (MASONRY) / WOOD<br>PRIMER (WOOD)          | SAND THE SURFACE WITH SAND PAPER 320 AND WIPE CLEAN |              |                               |                                    |                        |
| STEP 6<br>SANDING                                                                          | 0023                                                | MTO*         | BRUSH 8 - 10<br>SPRAY 15 - 20 | BRUSH 50 - 60<br>SPRAY 22 - 25     | 6 - 8 HRS              |
| STEP 7<br>FIRST COAT<br>SUPREMA ADVANCE PREMIUM GLOSS<br>ENAMEL<br>BRUSH / ROLLER / SPRAY  | 0023                                                | MTO*         | BRUSH 8 - 10<br>SPRAY 15 - 20 | BRUSH 50 - 60<br>SPRAY 22 - 25     | 6 - 8 HRS              |
| STEP 8<br>SECOND COAT<br>SUPREMA ADVANCE PREMIUM GLOSS<br>ENAMEL<br>BRUSH / ROLLER / SPRAY |                                                     |              |                               |                                    |                        |

(1.) As measured through a Food cup. (2.) Recoat period is quoted for 25°C and 50% Relative Humidity, these may vary under different conditions. (3.) Ensure that the metal substrates are free from oil, grease and rust before paint application. \*Mineral Turpentine Oil

## ADDITIONAL INFORMATION

### POST PAINTING CARE

For the best performance of the paint, ensure proper washing and cleaning of all algal and fungal growth, if any, at regular intervals of six months.

### PRECAUTIONS

- > Do not apply when ambient temperature is less than 10°C or if the temperature might drop to this level within 4 hours of application.
- > Do not over-thin or over-extend the brush.
- > Stir well and strain before use

### TECHNICAL DETAILS

a. IS Certification: IS 2932 certified

**b. Drying time:** Surface dry time 3 hours

**c. Gloss levels:** 75 - 85 on tin plate at 20° Gloss Head

**d. Flash point IS101/1987 Part 1 Sec 6:** 35°C (95°F)

**e. Stability of thinned paint:** To be used within 24 hours

### SAFETY FEATURES

- > Kindly refer to the MSDS for Asian Paints Suprema Advanced Premium Gloss Enamel which gives detailed information on safety measures while handling the paint, which is available on request.
- > Store the container with the lid tightly closed in an upright position, in a cool, dry place.
- > Keep out of reach of children and away from eatables.
- > May be harmful if swallowed. In case of ingestion seek immediate medical attention.
- > Wear eye protection during application. In case of contact with eyes, rinse immediately with plenty of water and seek medical advice.
- > In case of skin contact immediately wash skin with soap and plenty of water. Get medical attention if irritation develops or persists.
- > Do not breathe vapour or spray. It is recommended to wear suitable nose pad during sanding and surface preparation to avoid dust inhalation.
- > Do not pour leftover paint down the drain or in water courses.
- > In the event of spills, contain spillage using sand or earth.
- > No added Lead, Mercury or Chromium compounds.