

Product Code 6A31


Velour

Velour re-interprets innovatively the idea of seem-less velvet presenting a product with both a soft pearl-opaque look and a strong textured-feel effect. Velour can fulfil the widest demands for interior finishes, ensuring both textured-like feels and prestigious effects with its soft metallic shades.

PRODUCT FEATURES

AVAILABLE PACKS

Available in 1 ltr packsize

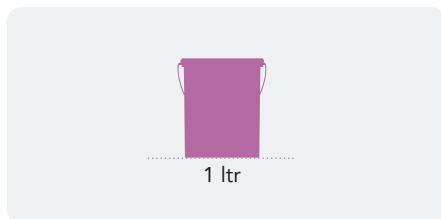

The packaged product shelf life is 24 months, if stored in the original sealed packages and at the adequate temperatures.

COLOUR

Silver

RECOMMENDED USAGE

Recommended on:

- New renderings or old plasters
- Concrete surfaces
- Old paints or dry, compact, absorbent, mineral coatings
- Various absorbent mineral substrates
- Insulating systems
- Plasterboards
- Marine MDF

IDENTIFICATION

Binding agent: Disperse copolymer of acrylic and styrene.
Density: 1,38 +/- 0,05 g/ml



HOW TO APPLY

PRODUCT PREPARATION & APPLICATION

Base Preparation - Cleaning: Sand the surface with emery paper 180 grade. Wipe clean. Primer: Apply a coat of Asian Paints wall primer (DCP WT). Allow drying for 3-4 hrs. Acrylic Putty: Smoothen the Surface with Asian Paints Acrylic Putty. Apply two to three coats to make the wall smooth. Allow proper drying in between two coats. Primer: Sand with emery pap 180 grade & wipe clean. Apply a coat

of Asian Paints Wall primer (DCP WT). Allow drying for 3-4 hrs. Tint & mix the velour silver base material with the desired shade.

Application of Velour - Apply a coat of Premium Emulsion White with the help of Sponge Roller throughout the wall. Let it dry for 3-4 hrs. Over dry substrate, apply one layer of tinted velour with a stainless steel trowel, spreading the paint evenly and remove any exceeding amount of product.

Once the surface is completely dry, apply a second layer of Velour, not diluted, with a stainless steel trowel. Work into the surface till it is wet, using a stainless steel trowel until reaching the desired effect. Drying time: 24 hours approx. depending on the kind of substrate, absorption rate and environmental conditions.

YIELD

50-60 sqft per liter, in two layers, depending on the kind of substrate and its absorption rate.

TOOLS CLEANING

Clean with water, immediately after use.

DILUTION

Ready to use.

ADDITIONAL INFORMATION

SAFETY FEATURES

Precautions for safe handling
Avoid contact with skin and eyes, inhalation of vapours and mists. Advice on general occupational hygiene: Do not eat or drink while working. Conditions for safe storage, including any incompatibilities. Keep away from food, drink and feed.

Incompatible materials: None in particular. Instructions as regards storage premises: Adequately ventilated premises. Description of first aid measures - In case of skin contact: Wash with plenty of water and soap. In case of eyes contact: Rinse immediately with plenty of water

and seek medical advice.

In case of Ingestion: Do not under any circumstances induce vomiting. **OBTAIN A MEDICAL EXAMINATION IMMEDIATELY.**

In case of Inhalation: Remove casualty to fresh air and keep warm and at rest.

RECOMMENDATIONS

During the entire application process, the product must be protected from cold and high heat changes. Do not apply with air, substrate and product temperature lower than +5°C and higher than +35°C, nor under direct sun light, nor on super-heated surfaces (even if already in shadow). Environmental humidity must be <10%. It is advisable

to complete each work with materials from the same batch of production. When using multiple batches, it is recommended to remix the various products together to avoid slight differences in shading. For the correct use, dilution and application of the products here mentioned, consult their respective technical data sheets.

WARNING

Properly mix the product before the application. Do not apply on fresh surfaces, wait for the adequate maturation time, generally of 4 weeks. Application on concrete surfaces has a decorative function. Do not apply in the presence of rising damp.