

PRODUCT CODE 1031

Apcolite Suprema Premium Interior Emulsion

Asian Paints Apcolite Suprema Premium Interior Emulsion provides an eco-friendly rich matt acrylic finish.

PRODUCT BENEFITS

It is a truly Green product

VOC conforms to the internationally accepted GS-11 (Green Seal) standards and is LEED compliant. It is developed exclusively for project sales.

Best in class whiteness

It delivers more whiteness in comparison to other products in the category making the walls look fresher and cleaner.

Superior Hiding

Best in class hiding.

Finish

It has a rich matt finish.

Anti-Fungal

Anti-fungal additives prevents growth of fungus.



WATER BASED

asianpaints


LEAD FREE* GUARANTEE

* All Asian Paints products contain no added Lead, Mercury, Arsenic or Chromium



PRODUCT FEATURES

WASHABILITY

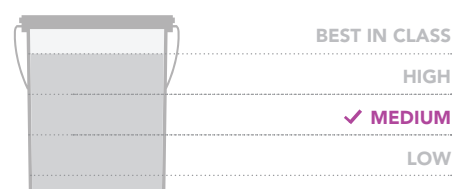

AVAILABLE PACKS




Shelf life: 3 years from date of manufacture in original tightly closed containers away from direct sunlight and excessive heat.


COLOURS AVAILABLE

600+*

*Currently available in more than 600 shades as per the Asian Paints Colour Spectra.



FINISH

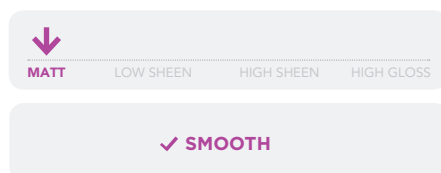

Refer to sheen levels in technical details

COVERAGE

On normal masonry surface after brushing



1 COAT

200 - 280
sq.ft/ltr**




2 COATS

120 - 140
sq.ft/ltr**

**Actual coverage may vary from the quoted coverage due to factors such as method and condition of application and surface roughness and porosity.

HOW TO APPLY

PRE PAINTING STEPS



PLASTER New masonry surfaces must be allowed to cure completely. It is recommended to allow 28 days as the curing time for new masonry surfaces.



CLEANING Surface should be free from any loose paint, dust or grease. Growths of fungus, algae or moss should be removed by wire brushing and water. In case of areas having excessive dampness use Asian Paints SmartCare Damp Block to limit further dampness. When the underlying surface exhibits chalkiness, in spite of thorough surface cleaning, use Asian Paints Exterior Sealer (X1).



FILLING FOR CRACKS For filling cracks upto 3mm use Asian Paints SmartCare Crack Seal.



FILLING FOR HOLES & DENTS For dents and holes upto 6mm, use Asian Paints TruCare Super Putty to level the surface.

Apcolite Suprema Premium Interior Emulsion should not be applied on surfaces / substrates that are subjected to continuous seepage or dampness.

PAINT APPLICATION PROCESS

APPLICATION	CODE	THINNER	DILUTION %	APPLICATION VISCOSITY ¹	RECOATING PERIOD
STEP 1 SANDING					
SAND THE SURFACE WITH SAND PAPER 180 AND WIPE CLEAN					
STEP 2 TRUCARE INTERIOR WALL PRIMER (ST) / TRUCARE INTERIOR WALL PRIMER (WT) BRUSH / SPRAY / ROLLER	0359	MTO*	BRUSH 8 - 10 SPRAY 15 - 20	BRUSH 30 - 40 SPRAY 20 - 25	6 - 8 HRS
	0360	WATER	80% - 100 %	BRUSH 30 - 40 SPRAY 20 - 25	4 - 6 HRS
STEP 3 TRUCARE ACRYLIC WALL PUTTY PUTTY KNIFE					
	1354	WATER	BASED ON REQUIREMENT	N/A	4 - 6 HRS
STEP 4 SANDING					
SAND THE SURFACE WITH SAND PAPER 180 AND WIPE CLEAN					
STEP 5 TRUCARE INTERIOR WALL PRIMER (ST) / TRUCARE INTERIOR WALL PRIMER (WT) BRUSH / SPRAY	0359	MTO*	BRUSH 8 - 10 SPRAY 15 - 20	BRUSH 30 - 40 SPRAY 20 - 25	6 - 8 HRS
	0360	WATER	80% - 100 %	BRUSH 30 - 40 SPRAY 20 - 25	4 - 6 HRS
STEP 6 SANDING					
SAND THE SURFACE WITH SAND PAPER 320 AND WIPE CLEAN					
STEP 7 FIRST COAT APCOLITE SUPREMA PREMIUM INTERIOR EMULSION OPTIONAL	1031	WATER	BRUSH 55 - 60 SPRAY 60 - 65	BRUSH 30 - 40 SPRAY 20 - 25	4 - 6 HRS
	1031	WATER	BRUSH 55 - 60 SPRAY 60 - 65	BRUSH 30 - 40 SPRAY 20 - 25	4 - 6 HRS
STEP 8 SECOND COAT APCOLITE SUPREMA PREMIUM INTERIOR EMULSION BRUSH / SPRAY					
	1031	WATER	BRUSH 55 - 60 SPRAY 60 - 65	BRUSH 30 - 40 SPRAY 20 - 25	4 - 6 HRS


1. As measured through a Ford cup. 2. Recoat period is quoted for 30°C and 60 - 65% Relative Humidity, these may vary under different conditions. * Mineral Turpentine Oil

HOW TO CHOOSE COLOURS

Browse through Asian Paints colour tools to help you find the right colour combination

COLOUR SPECTRA FAN DECK*

INTERIOR COLOUR COMBINATIONS GUIDE

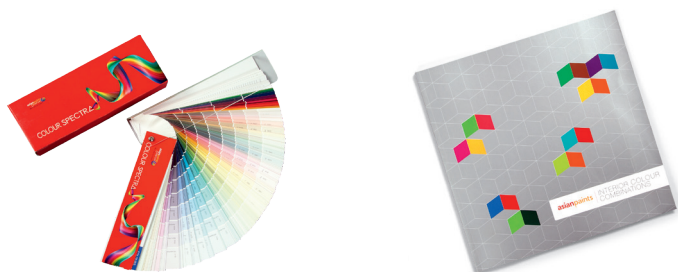

*These shades are for reference only. Please refer to the Colour Spectra or Colour Palette for correct shade reference

ADDITIONAL INFORMATION

VOC CONTENT



**LOW VOC
CONTENT**

Asian Paints Apcolite Suprema Premium Interior Emulsion meets LEED VOC criteria as per Indian Green Building Council Version 1 (Tested at Shriram Institute of Industrial Research)

PRECAUTIONS

- › Do not apply when ambient temperature is less than 10°C or if the temperature might drop to this level within 4 hours of application.
- › Do not over-thin or over-extend the brush.
- › Tint using Asian Paints machine colourants only
- › Stir well and strain before use.
- › Tinted paints need thorough shaking immediately after tinter addition as well as before use.

POST PAINTING CARE

For best performance ensure dry dust cleaning at regular intervals. Allow drying time of 3 weeks for proper film formation before any sponge cleaning with mild soap solution.

TECHNICAL DETAILS

- a. Drying time:** Surface dry time 30 minutes
Recoatability - 4 hours
- b. Sheen levels:** 2 - 5 at 60 ° GH
- c. Flash point IS101/1987 Part 1, Sec 6:** NA, non-flammable
- d. Stability of thinned paint:** To be used within 24 hours

SAFETY FEATURES

- › Kindly refer to the MSDS for Asian Paints Apcolite Suprema Premium Interior Emulsion which gives detailed information on safety measures while handling the paint, which is available on request.
- › Store the container with the lid tightly closed in an upright position, in a cool, dry place.
- › Keep out of reach of children and away from eatables.
- › May be harmful if swallowed. In case of ingestion seek immediate medical attention.
- › Wear eye protection during application. In case of contact with eyes, rinse immediately with plenty of water and seek medical advice.
- › In case of skin contact immediately wash skin with soap and plenty of water. Get medical attention if irritation develops or persists.
- › Do not breathe vapour or spray. It is recommended to wear suitable nose pad during sanding and surface preparation to avoid dust inhalation
- › Do not pour leftover paint down the drain or in water courses.
- › In the event of spills, contain spillage using sand or earth.
- › No added Lead, Mercury or Chromium compounds.