

PRODUCT CODE 5699

Tractor Suprema Emulsion

Asian Paints Tractor Suprema Emulsion comes with Superior Anti Fungal Shield and gives a smooth finish to the wall. It is a smart choice if you have been previously using distemper.

PRODUCT BENEFITS

A Smart Upgrade

Tractor Suprema Emulsion is the perfect way to make a smart upgrade from distempers. It offers the finish of plastic paint, at a cost that is not too different from distemper. It also lasts for at least 3 - 4 years, so you don't have to paint that often.

Superior Anti Fungal Shield

Tractor Suprema Emulsion offers excellent protection against fungal growth thus reducing the chances of fungal black spots on your walls

Colour

Tractor Suprema Emulsion offers a wide range of shades (1100+). So you can choose your favourite colours for your home.




WATER BASED

asianpaints
LEAD FREE* GUARANTEE

* All Asian Paints products contain no added

PRODUCT FEATURES

WASHABILITY

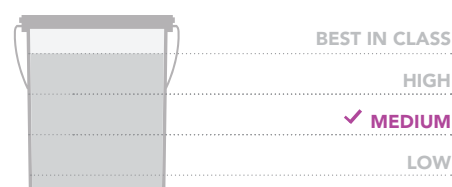

AVAILABLE PACKS




Shelf life: 3 years from date of manufacture in original tightly closed containers away from direct sunlight and excessive heat.


COLOURS AVAILABLE

1100+*

*Currently available in more than 1100 shades as per the Asian Paints Colour Spectra.



FINISH

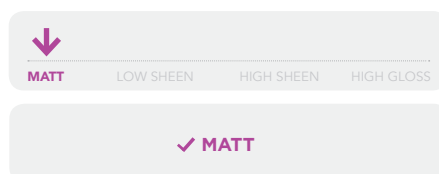

COVERAGE

On normal masonry surface after brushing



1 COAT

200 - 220
sq.ft/ltr**




2 COATS

100 - 110
sq.ft/ltr**

**Actual coverage may vary from the quoted coverage due to factors such as method and condition of application and surface roughness and porosity.

HOW TO APPLY

PRE PAINTING STEPS



PLASTER New masonry surfaces must be allowed to cure completely. It is recommended to allow 28 days as the curing time for new masonry surfaces.



CLEANING Surface should be free from any loose paint, dust or grease. Growths of fungus, algae or moss should be removed by wire brushing and water. In case of areas having excessive dampness use Asian Paints DampBlock to limit further dampness.



FILLING FOR CRACKS For filling cracks upto 3mm use Asian Paints Smart Care Crack Seal.



FILLING FOR HOLES & DENTS In case of dents and holes use Asian Paints Acrylic Wall Putty or white cement and fine sand in the ratio 1:3.

For interior surfaces or substrates that are subjected to continuous seepage or dampness, kindly use Asian Paints SmartCare Damp Block before the top coat application.

PAINT APPLICATION PROCESS

APPLICATION

STEP 1
SANDING

STEP 2
DECOPRIME CEMENT
PRIMER (ST) /
DECOPRIME CEMENT
PRIMER (WT)
BRUSH / ROLLER / SPRAY

STEP 3
ACRYLIC WALL PUTTY
PUTTY KNIFE

STEP 4
SANDING

STEP 5
DECOPRIME CEMENT
PRIMER (ST) /
DECOPRIME CEMENT
PRIMER (WT)
BRUSH / ROLLER / SPRAY

STEP 6
SANDING

STEP 7
FIRST COAT
TRACTOR SUPREMA EMULSION
BRUSH / ROLLER / SPRAY
STEP 8
SECOND COAT
TRACTOR SUPREMA EMULSION
BRUSH / ROLLER / SPRAY

CODE

THINNER

DILUTION %

APPLICATION VISCOSITY¹

RECOATING PERIOD

SAND THE SURFACE WITH SAND PAPER 180 AND WIPE CLEAN

0359	MTO*	BRUSH / ROLLER 8 - 10 SPRAY 15 - 20	BRUSH / ROLLER 30 - 40 SPRAY 20 - 25	6 - 8 HRS
0360	WATER	80% - 100 %	BRUSH / ROLLER 30 - 40 SPRAY 20 - 25	4 - 6 HRS

1354	WATER	BASED ON REQUIREMENT	N/A	4 - 6 HRS
------	-------	----------------------	-----	-----------

SAND THE SURFACE WITH SAND PAPER 180 AND WIPE CLEAN

0359	MTO*	BRUSH / ROLLER 8 - 10 SPRAY 15 - 20	BRUSH / ROLLER 30 - 40 SPRAY 20 - 25	6 - 8 HRS
0360	WATER	80% - 100 %	BRUSH / ROLLER 30 - 40 SPRAY 20 - 25	4 - 6 HRS

SAND THE SURFACE WITH SAND PAPER 180 AND WIPE CLEAN

5699	WATER	BRUSH / ROLLER 50 - 60 SPRAY 50 - 60	BRUSH / ROLLER 30 - 35 SPRAY 22 - 25	4 HRS
5699	WATER	BRUSH / ROLLER 50 - 60 SPRAY 50 - 60	BRUSH / ROLLER 30 - 35 SPRAY 22 - 25	4 HRS

1. As measured through a Ford cup. 2. Recoat period is quoted for 25°C and 50% Relative Humidity, these may vary under different conditions. Mineral Turpentine Oil

HOW TO CHOOSE COLOURS

Browse through Asian Paints colour tools to help you find the right colour combination

COLOUR SPECTRA FAN DECK



*These shades are for reference only. Please refer to the Colour Spectra or Colour Palette for correct shade reference

ADDITIONAL INFORMATION

POST PAINTING CARE

For the best performance of the paint, ensure proper washing and cleaning of all algal and fungal growth, if any, at regular intervals of six months.

TECHNICAL DETAILS

- a. Drying time:** Surface dry time 30 minutes
- b. Sheen levels:** 2 - 5 at 60°GH
- c. Flash point IS101/1987 Part 1, Sec 6:** NA
- d. Stability of thinned paint:** To be used within 24 hours

PRECAUTIONS

- › Do not apply when ambient temperature is less than 10°C or if the temperature might drop to this level within 4 hours of application.
- › Do not over-thin or over-extend the brush.
- › Tint using Asian Paints machine colourants only.
- › Stir well and strain before use.
- › Tinted paints need thorough shaking immediately after tinter addition as well as before use.

SAFETY FEATURES

- › Store the container with the lid tightly closed in an upright position, in a cool, dry place.
- › Keep out of reach of children and away from eatables.
- › May be harmful if swallowed. In case of ingestion seek immediate medical attention.
- › Wear eye protection during application. In case of contact with eyes, rinse immediately with plenty of water and seek medical advice.
- › In case of skin contact immediately wash skin with soap and plenty of water. Get medical attention if irritation develops or persists.
- › Do not breathe vapour or spray. It is recommended to wear suitable nose pad during sanding and surface preparation to avoid dust inhalation.
- › Do not pour leftover paint down the drain or in water courses.
- › In the event of spills, contain spillage using sand or earth.
- › No added Lead, Mercury or Chromium compounds.